

MFS6 specifications

Number of Cylinders	1
Output	6 hp (4.4 kw)
Displacement	123 cc (7.5 cu.in)
Bore x Stroke	59 x 45 mm (2.32 x 1.77 in)
Starting	Manual
Control Type	Tiller Handle
Gear Shift	Forward - Neutral - Reverse
Gear Ratio	2.15:1
Propeller Selection Range	6" - 9"
Transom Height	15", 20", 25"
Fuel Tank	Internal and External Models*
Weight	55 lbs (25 kg)
Alternator Output	Optional: 12V, 60W, 5A**
Max RPM Range	5,000 - 6,000

Standard features include: Digital CD Ignition System, Start in Gear Protection, Thermostat Controlled Cooling System, Through-The-Prop Exhaust, Oil Pressure Warning, and Shallow Water Drive

*Internal Fuel Tank Models (MFS6DD): 0.3 US Gal (1.15 Lit) Integral Tank (includes an external fuel tank connector installed on engine to allow user to use an optional external fuel tank) / External Fuel Tank Models (MFS6D): 3.1 US Gal (12 Lit) Separate Fuel Tank

**Standard on SailPro models




TOHATSU

Feel the Wind™

MFS6

The Tohatsu 6 hp 4-stroke outboard provides all the power you need for motoring in a small craft. The engine provides fuel efficiency second to none, and a redesigned carrying handle and holding grip makes it convenient to transport.

Also available in a SailPro model, specifically designed for sail boaters!

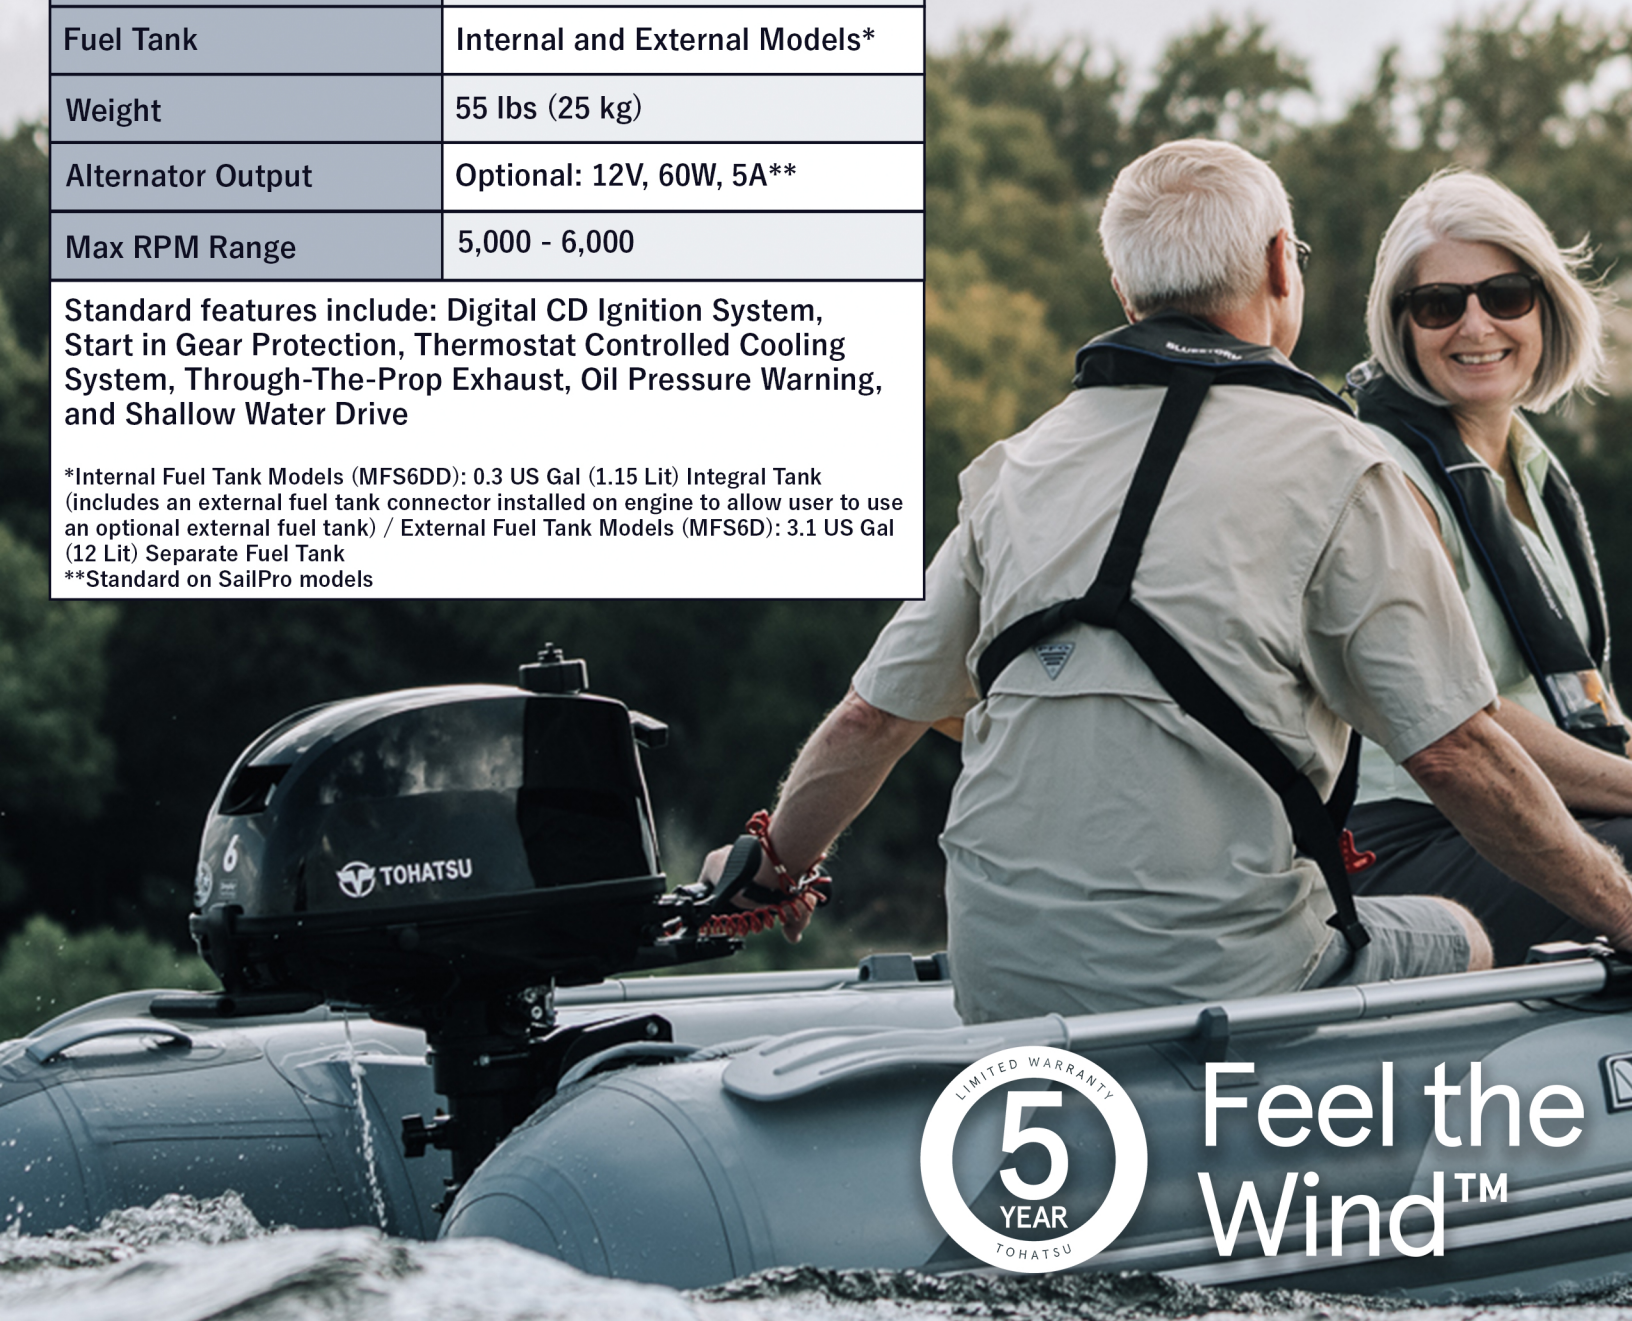

Feel the Wind™